


PREFERRED INSTALLATION

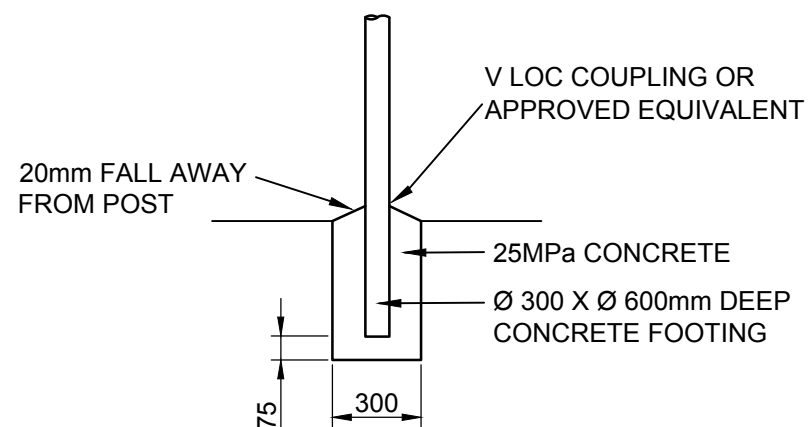


ALTERNATE INSTALLATION


NOTES

1. ALL SIGNS TO BE REFLECTORIZED CLASS 1 TO AS1743 UNLESS NOTED OTHERWISE.
2. ALL SIGNS AND SIGN POST ANCHORING DETAILS ARE TO BE APPROVED BY COUNCIL PRIOR TO ERECTION.
3. ALL SIGNS SHALL BE IN ACCORDANCE WITH THE AS1742 MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.
4. SIGNS SHALL BE ALUMINUM ALLOY NOT LESS THAN 2mm THICK TO AS 2848.
5. EQUIVALENT COUPLINGS OF SIMILAR PURPOSE MAY BE USED SUBJECT TO COUNCIL APPROVAL.
6. ALL PIPES TO BE GALVANISED STEEL PIPE TO AS1074. GALVANIZING TO AS1650.
7. CONCRETE MINIMUM N25 IN ACCORDANCE WITH AS 3600.
8. ALL FASTENERS SHALL BE TAMPER / VANDAL RESISTANT.
9. PROPRIETARY COUPLINGS SHALL BE INSTALLED WITH MANUFACTURERS RECOMMENDATIONS.
10. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED.

TYPICAL SIGN & INSTALLATION DETAIL
(RURAL & URBAN ROADS)

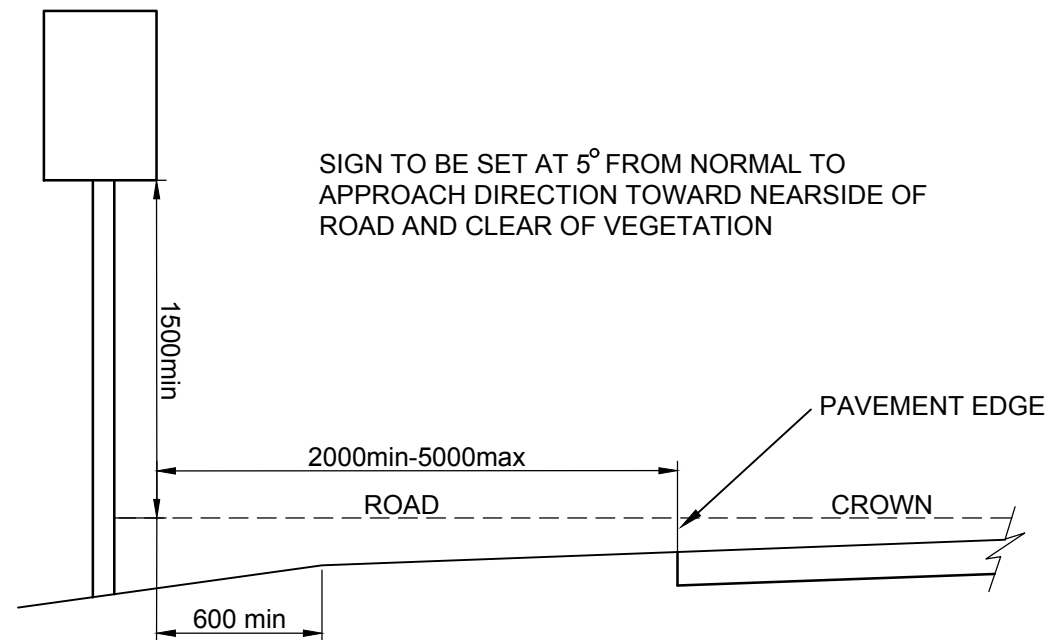

RURAL ROADS

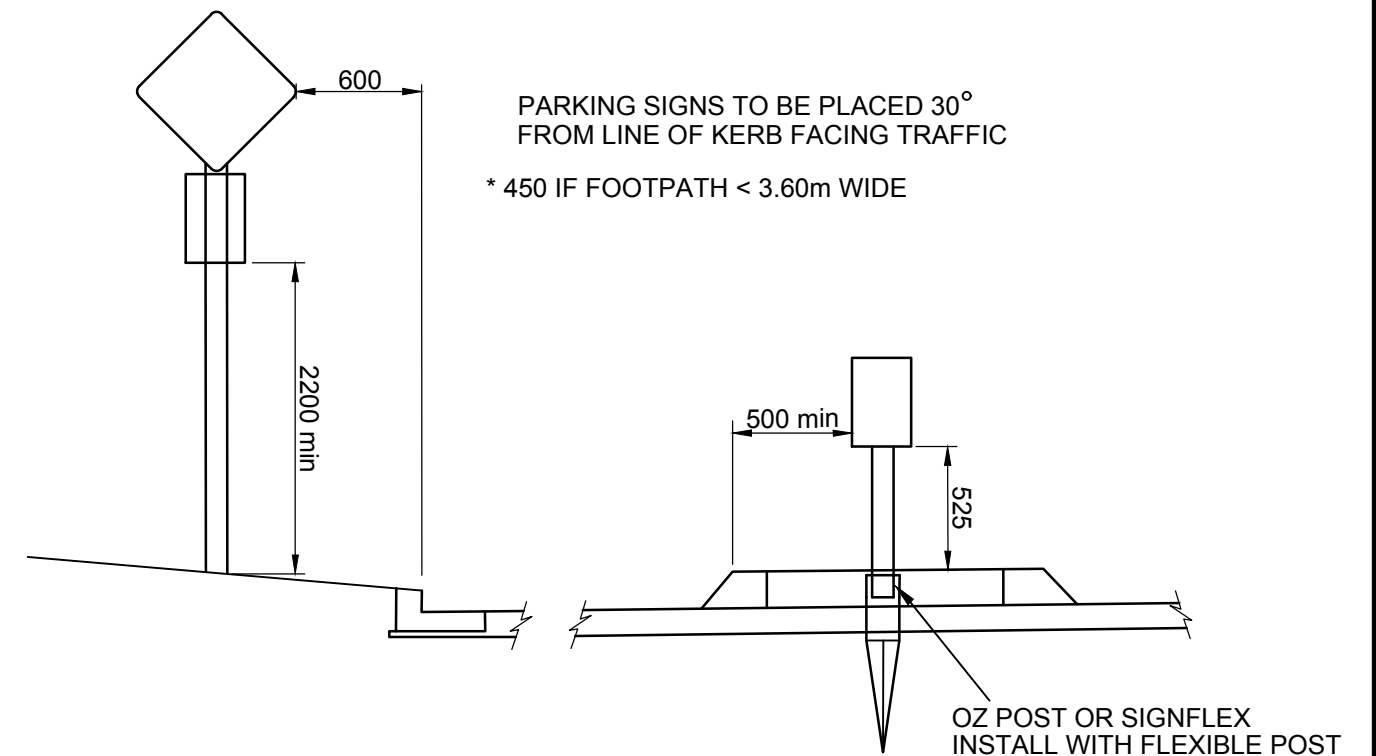

URBAN ROADS

LOCATION OF SIGNS

Armidale Regional Council Dept of Public Infrastructure	SCALES NTS	APPROVED D. MAUNDER MANAGER ENGINEERING AND STANDARDS SUPPORT 10/11/2016 DATE	SHEET 1 OF 1
	STANDARD ROAD SIGN INSTALLATION	SURV DRWN PD DES CIM/PJN CHKD MW	AS SHEET SIZE A3 DRAWING No 030-077 CADFILE 030-077.dwg DATE 10/11/2016