

100mm DEPTH APPROVED MULCH MATERIAL (UNLESS OTHERWISE SPECIFIED). MULCH TO FINISH 25mm BELOW PAVING LEVEL.


220 X 100mm DEPTH CONCRETE FOOTING TO PERIMETER OF FOOTPATH PLANTER.

ROOT BARRIER

600mm DEPTH GOOD QUALITY IMPORTED SOIL MIX.

SUBSOIL DRAINAGE TO ADC STANDARD DRAWING TYPICAL DETAILS OF ROAD SUB-SOIL DRAIN XXX-XXX.

SECTION

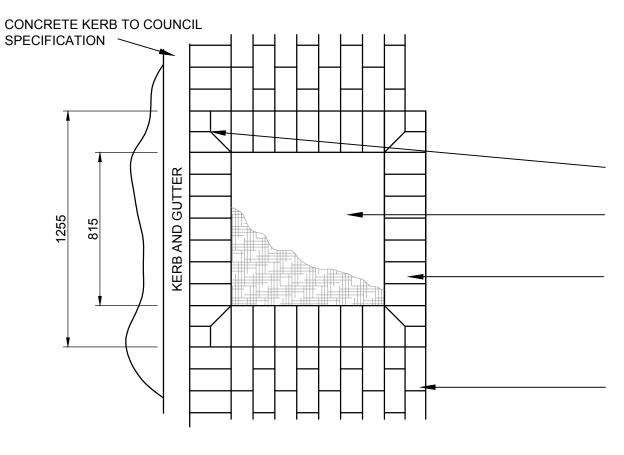

MITRE ALL 90 ANGLES (AS SHOWN)

MULCHED GARDEN BED 815mm SQUARE X 700mm DEPTH, PLANT AS SPECIFIED.

HEADER COURSE LAID ON 220mm WIDTH X 100mm DEPTH CONCRETE FOOTING. FLUSH POINT ALL JOINTS.

PAVING AS SPECIFIED.

NOTES

- 1. TREE PLANTING WITHIN A BRICK PAVED FOOTPATHS
- INTERNAL DIMENSIONS OF PLANTING PIT: 815mm X 815mm
- 3. FOOTPATH PLANTERS SHALL USE PAVERS FOR THE HEADER COURSE WHICH MATCH SURROUNDING PAVING TYPE
- 4. THE PLANTER SHALL BE CONSTRUCTED AS SHOWN IN THE DETAIL OPPOSITE. ATTENTION SHOULD BE GIVEN TO THE CONCRETE FOOTING BENEATH THE HEADER COURSE. WHICH SHOULD FINISH FLUSH WITH THE INSIDE EDGE OF PAVERS.
- 5. PLAN SPECIES TO BE NOMINATED BY ARMIDALE REGIONAL COUNCIL. MINIMUM POT SIZE SHOULD BE 200mm (ADVANCED STOCK). WHEN PLANTING, THE EXISTING SOIL LINE WITHIN THE CONTAINERS SHOULD FINNISH AT A LEVEL 100mm BELOW THE ADJACENT PAVING LEVEL.

PLAN

